



AiP74AUP1G126

Low Power Single Buffer/Line Driver; 3-State

Product Specification

Specification Revision History:

Version	Date	Description
2023-11-A0	2023-11	New
2024-02-A1	2024-02	Modify parameters



Contents

1、General Description.....	1
2、Block Diagram And Pin Description	2
2.1、Block Diagram	2
2.2、Pin Configurations.....	2
2.3、Pin Description.....	2
2.4、Function Table.....	2
3、Electrical Parameter	3
3.1、Absolute Maximum Ratings.....	3
3.2、Recommended Operating Conditions.....	3
3.3、Electrical Characteristics	3
3.3.1、DC Characteristics 1	3
3.3.2、DC Characteristics 2	5
3.3.3、DC Characteristics 3	6
3.3.4、AC Characteristics 1	7
3.3.5、AC Characteristics 2	9
3.3.6、AC Characteristics 3	11
4.1、AC Testing Circuit	13
4.2、AC Testing Waveforms.....	13
4.3、Measurement Points	14
4.4、Test Data	14
5、Package Information.....	15
5.1、SOT23-5	15
5.2、SOT353	16
6、Statements And Notes	17
6.1、The name and content of Hazardous substances or Elements in the product	17
6.2、Notes	17



1、General Description

The AiP74AUP1G126 provides a single non-inverting buffer/line driver with 3-state output. The device has the input-disable feature, which allows floating input signals.

This device ensures a very low static and dynamic power consumption across the entire V_{CC} range from 0.8V to 3.6V.

Features:

- Wide supply voltage range from 0.8V to 3.6V
- Low static power consumption; $I_{CC}=1\mu A$ (maximum)
- Inputs accept voltages up to 3.6V
- Specified from $-40^{\circ}C$ to $+125^{\circ}C$
- Packaging information: SOT23-5/SOT353

Ordering Information:

Reel packing specifications:

Part number	Packaging form	Marking code	Reel quantity	Boxed reel quantity	Notes
AiP74AUP1G126 GB235.TR	SOT23-5	FLXX	3000 PCS/reel	30000 PCS/box	Dimensions of plastic enclosure: 2.9mm×1.6mm Pin spacing: 0.95mm
AiP74AUP1G126 GC353.TR	SOT353	FLXX	3000 PCS/reel	30000 PCS/box	Dimensions of plastic enclosure: 2.1mm×1.3mm Pin spacing: 0.65mm

Note 1: "XX" refers to variable content, meaning year and package batch serial number.

Note 2: If the physical information is inconsistent with the ordering information, please refer to the actual product.



2、Block Diagram And Pin Description

2.1、Block Diagram




Figure 1. Logic symbol


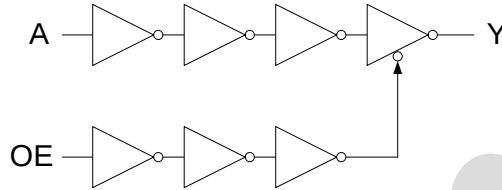


Figure 2. Logic diagram

2.2、Pin Configurations

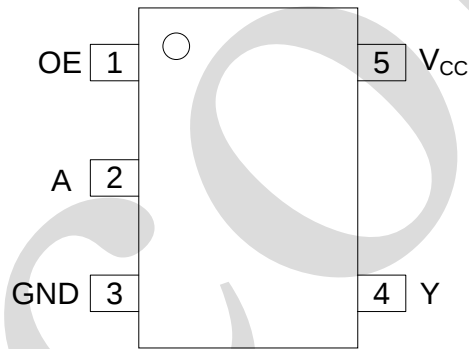

2.3、Pin Description

Pin No.	Pin Name	Description
1	OE	output enable input
2	A	data input
3	GND	ground (0V)
4	Y	data output
5	Vcc	supply voltage

2.4、Function Table

Input		Output
OE	A	Y
H	L	L
H	H	H
L	X	Z

Note: H = HIGH voltage level; L= LOW voltage level; X = Don't care; Z = high-impedance OFF-state.



3、Electrical Parameter

3.1、Absolute Maximum Ratings

($T_{amb}=25^{\circ}\text{C}$, all voltage referenced to GND, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Max.	Unit
supply voltage	V_{CC}	-	-0.5	+4.6	V
input clamping current	I_{IK}	$V_I < 0\text{V}$	-50	-	mA
input voltage	V_I	-	-0.5	+4.6	V
output clamping current	I_{OK}	$V_O < 0\text{V}$	-50	-	mA
output voltage	V_O	Active mode and Power-down mode	-0.5	+4.6	V
output current	I_O	$V_O = 0\text{V}$ to V_{CC}	-	± 20	mA
supply current	I_{CC}	-	-	50	mA
ground current	I_{GND}	-	-50	-	mA
storage temperature	T_{stg}	-	-65	+150	$^{\circ}\text{C}$
total power dissipation	P_{tot}	-	-	250	mW
soldering temperature	T_L	10s	260		$^{\circ}\text{C}$

3.2、Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
supply voltage	V_{CC}	-	0.8	-	3.6	V
input voltage	V_I	-	0	-	3.6	V
output voltage	V_O	Active mode	0	-	V_{CC}	V
		Power-down mode; $V_{CC}=0\text{V}$	0	-	3.6	V
ambient temperature	T_{amb}	-	-40	-	+125	$^{\circ}\text{C}$

3.3、Electrical Characteristics

3.3.1、DC Characteristics 1

($T_{amb}=25^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
HIGH-level input voltage	V_{IH}	$V_{CC}=0.8\text{V}$		$0.70 \times V_{CC}$	-	-	V
		$V_{CC}=0.9\text{V}$ to 1.95V		$0.65 \times V_{CC}$	-	-	V
		$V_{CC}=2.3\text{V}$ to 2.7V		1.6	-	-	V
		$V_{CC}=3.0\text{V}$ to 3.6V		2.0	-	-	V
LOW-level input voltage	V_{IL}	$V_{CC}=0.8\text{V}$		-	-	$0.30 \times V_{CC}$	V
		$V_{CC}=0.9\text{V}$ to 1.95V		-	-	$0.35 \times V_{CC}$	V
		$V_{CC}=2.3\text{V}$ to 2.7V		-	-	0.7	V
		$V_{CC}=3.0\text{V}$ to 3.6V		-	-	0.9	V
HIGH-level output voltage	V_{OH}	$V_I = V_{IH}$ or V_{IL}	$I_O = -20\mu\text{A}; V_{CC}=0.8\text{V}$ to 3.6V	$V_{CC} - 0.1$	-	-	V
			$I_O = -1.1\text{mA}; V_{CC}=1.1\text{V}$	$0.75 \times V_{CC}$	-	-	V
			$I_O = -1.7\text{mA}; V_{CC}=1.4\text{V}$	1.11	-	-	V



			$I_O=-1.9\text{mA}; V_{CC}=1.65\text{V}$	1.32	-	-	V
			$I_O=-2.3\text{mA}; V_{CC}=2.3\text{V}$	2.05	-	-	V
			$I_O=-3.1\text{mA}; V_{CC}=2.3\text{V}$	1.90	-	-	V
			$I_O=-2.7\text{mA}; V_{CC}=3.0\text{V}$	2.72	-	-	V
			$I_O=-4.0\text{mA}; V_{CC}=3.0\text{V}$	2.60	-	-	V
LOW-level output voltage	V_{OL}	$V_I = V_{IH} \text{ or } V_{IL}$	$I_O=20\mu\text{A}; V_{CC}=0.8\text{V to } 3.6\text{V}$	-	-	0.10	V
			$I_O=1.1\text{mA}; V_{CC}=1.1\text{V}$	-	-	$0.30 \times V_{CC}$	V
			$I_O=1.7\text{mA}; V_{CC}=1.4\text{V}$	-	-	0.31	V
			$I_O=1.9\text{mA}; V_{CC}=1.65\text{V}$	-	-	0.31	V
			$I_O=2.3\text{mA}; V_{CC}=2.3\text{V}$	-	-	0.31	V
			$I_O=3.1\text{mA}; V_{CC}=2.3\text{V}$	-	-	0.44	V
			$I_O=2.7\text{mA}; V_{CC}=3.0\text{V}$	-	-	0.31	V
			$I_O=4.0\text{mA}; V_{CC}=3.0\text{V}$	-	-	0.44	V
input leakage current	I_I	$V_I=\text{GND to } 3.6\text{V}; V_{CC}=0\text{V to } 3.6\text{V}$		-	-	± 1	μA
OFF-state output current	I_{OZ}	$V_I = V_{IH} \text{ or } V_{IL}; V_O = 0\text{V to } 3.6\text{V}; V_{CC}=0\text{V to } 3.6\text{V}$		-	-	± 1	μA
power-off leakage current	I_{OFF}	$V_I \text{ or } V_O=0\text{V to } 3.6\text{V}; V_{CC}=0\text{V}$		-	-	± 1	μA
additional power-off leakage current	ΔI_{OFF}	$V_I \text{ or } V_O=0\text{V to } 3.6\text{V}; V_{CC}=0\text{V to } 0.2\text{V}$		-	-	± 1	μA
supply current	I_{CC}	$V_I=\text{GND or } V_{CC}; I_O=0\text{A}; V_{CC}=0.8\text{V to } 3.6\text{V}$		-	-	1	μA
additional supply current	ΔI_{CC}	data input; $V_I=V_{CC}-0.6\text{V}; I_O=0\text{A}; V_{CC}=3.3\text{V}$		-	-	40	μA
		OE input; $V_I=V_{CC}-0.6\text{V}; I_O=0\text{A}; V_{CC}=3.3\text{V}$		-	-	110	μA
		all inputs; $V_I=\text{GND to } 3.6\text{V}; \text{OE}=\text{GND}; V_{CC}=0.8\text{V to } 3.6\text{V}$		-	-	1	μA



3.3.2、DC Characteristics 2

($T_{amb}=-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
HIGH-level input voltage	V_{IH}	$V_{CC}=0.8\text{V}$		$0.70 \times V_{CC}$	-	-	V
		$V_{CC}=0.9\text{V}$ to 1.95V		$0.65 \times V_{CC}$	-	-	V
		$V_{CC}=2.3\text{V}$ to 2.7V		1.6	-	-	V
		$V_{CC}=3.0\text{V}$ to 3.6V		2.0	-	-	V
LOW-level input voltage	V_{IL}	$V_{CC}=0.8\text{V}$		-	-	$0.30 \times V_{CC}$	V
		$V_{CC}=0.9\text{V}$ to 1.95V		-	-	$0.35 \times V_{CC}$	V
		$V_{CC}=2.3\text{V}$ to 2.7V		-	-	0.7	V
		$V_{CC}=3.0\text{V}$ to 3.6V		-	-	0.9	V
HIGH-level output voltage	V_{OH}	$V_I = V_{IH}$ or V_{IL}	$I_O=-20\mu\text{A}; V_{CC}=0.8\text{V}$ to 3.6V	$V_{CC}-0.1$	-	-	V
			$I_O=-1.1\text{mA}; V_{CC}=1.1\text{V}$	$0.70 \times V_{CC}$	-	-	V
			$I_O=-1.7\text{mA}; V_{CC}=1.4\text{V}$	1.03	-	-	V
			$I_O=-1.9\text{mA}; V_{CC}=1.65\text{V}$	1.30	-	-	V
			$I_O=-2.3\text{mA}; V_{CC}=2.3\text{V}$	1.97	-	-	V
			$I_O=-3.1\text{mA}; V_{CC}=2.3\text{V}$	1.85	-	-	V
			$I_O=-2.7\text{mA}; V_{CC}=3.0\text{V}$	2.67	-	-	V
			$I_O=-4.0\text{mA}; V_{CC}=3.0\text{V}$	2.55	-	-	V
LOW-level output voltage	V_{OL}	$V_I = V_{IH}$ or V_{IL}	$I_O=20\mu\text{A}; V_{CC}=0.8\text{V}$ to 3.6V	-	-	0.10	V
			$I_O=1.1\text{mA}; V_{CC}=1.1\text{V}$	-	-	$0.30 \times V_{CC}$	V
			$I_O=1.7\text{mA}; V_{CC}=1.4\text{V}$	-	-	0.37	V
			$I_O=1.9\text{mA}; V_{CC}=1.65\text{V}$	-	-	0.35	V
			$I_O=2.3\text{mA}; V_{CC}=2.3\text{V}$	-	-	0.33	V
			$I_O=3.1\text{mA}; V_{CC}=2.3\text{V}$	-	-	0.45	V
			$I_O=2.7\text{mA}; V_{CC}=3.0\text{V}$	-	-	0.33	V
			$I_O=4.0\text{mA}; V_{CC}=3.0\text{V}$	-	-	0.45	V
input leakage current	I_I	$V_I=\text{GND}$ to $3.6\text{V}; V_{CC}=0\text{V}$ to 3.6V		-	-	± 2	μA
OFF-state output current	I_{OZ}	$V_I = V_{IH}$ or $V_{IL}; V_O=0\text{V}$ to $3.6\text{V}; V_{CC}=0\text{V}$ to 3.6V		-	-	± 2	μA
power-off leakage current	I_{OFF}	V_I or $V_O=0\text{V}$ to $3.6\text{V}; V_{CC}=0\text{V}$		-	-	± 2	μA
additional power-off leakage current	ΔI_{OFF}	V_I or $V_O=0\text{V}$ to $3.6\text{V}; V_{CC}=0\text{V}$ to 0.2V		-	-	± 2	μA
supply current	I_{CC}	$V_I=\text{GND}$ or $V_{CC}; I_O=0\text{A}; V_{CC}=0.8\text{V}$ to 3.6V		-	-	2	μA



additional supply current	ΔI_{CC}	data input; $V_I=V_{CC}-0.6V$; $I_O=0A$; $V_{CC}=3.3V$	-	-	50	μA
		OE input; $V_I=V_{CC}-0.6V$; $I_O=0A$; $V_{CC}=3.3V$	-	-	120	μA
		all inputs; $V_I=GND$ to $3.6V$; $OE=GND$; $V_{CC}=0.8V$ to $3.6V$	-	-	1	μA

3.3.3、DC Characteristics 3

($T_{amb}=-40^{\circ}C$ to $+125^{\circ}C$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
HIGH-level input voltage	V_{IH}	$V_{CC}=0.8V$		$0.75 \times V_{CC}$	-	-	V
		$V_{CC}=0.9V$ to $1.95V$		$0.70 \times V_{CC}$	-	-	V
		$V_{CC}=2.3V$ to $2.7V$		1.6	-	-	V
		$V_{CC}=3.0V$ to $3.6V$		2.0	-	-	V
LOW-level input voltage	V_{IL}	$V_{CC}=0.8V$		-	-	$0.25 \times V_{CC}$	V
		$V_{CC}=0.9V$ to $1.95V$		-	-	$0.30 \times V_{CC}$	V
		$V_{CC}=2.3V$ to $2.7V$		-	-	0.7	V
		$V_{CC}=3.0V$ to $3.6V$		-	-	0.9	V
HIGH-level output voltage	V_{OH}	$V_I = V_{IH} \text{ or } V_{IL}$	$I_O=-20\mu A$; $V_{CC}=0.8V$ to $3.6V$	$V_{CC}-0.11$	-	-	V
			$I_O=-1.1mA$; $V_{CC}=1.1V$	$0.60 \times V_{CC}$	-	-	V
			$I_O=-1.7mA$; $V_{CC}=1.4V$	0.93	-	-	V
			$I_O=-1.9mA$; $V_{CC}=1.65V$	1.17	-	-	V
			$I_O=-2.3mA$; $V_{CC}=2.3V$	1.77	-	-	V
			$I_O=-3.1mA$; $V_{CC}=2.3V$	1.67	-	-	V
			$I_O=-2.7mA$; $V_{CC}=3.0V$	2.40	-	-	V
			$I_O=-4.0mA$; $V_{CC}=3.0V$	2.30	-	-	V
LOW-level output voltage	V_{OL}	$V_I = V_{IH} \text{ or } V_{IL}$	$I_O=20\mu A$; $V_{CC}=0.8V$ to $3.6V$	-	-	0.11	V
			$I_O=1.1mA$; $V_{CC}=1.1V$	-	-	$0.33 \times V_{CC}$	V
			$I_O=1.7mA$; $V_{CC}=1.4V$	-	-	0.41	V
			$I_O=1.9mA$; $V_{CC}=1.65V$	-	-	0.39	V
			$I_O=2.3mA$; $V_{CC}=2.3V$	-	-	0.36	V
			$I_O=3.1mA$; $V_{CC}=2.3V$	-	-	0.50	V
			$I_O=2.7mA$; $V_{CC}=3.0V$	-	-	0.36	V
			$I_O=4.0mA$; $V_{CC}=3.0V$	-	-	0.50	V
input leakage current	I_I	$V_I=GND$ to $3.6V$; $V_{CC}=0V$ to $3.6V$		-	-	± 4	μA
OFF-state output current	I_{OZ}	$V_I = V_{IH} \text{ or } V_{IL}$; $V_O=0V$ to $3.6V$; $V_{CC}=0V$ to $3.6V$		-	-	± 4	μA



power-off leakage current	I_{OFF}	V_I or $V_O=0V$ to $3.6V$; $V_{CC}=0V$	-	-	± 4	μA
additional power-off leakage current	ΔI_{OFF}	V_I or $V_O=0V$ to $3.6V$; $V_{CC}=0V$ to $0.2V$	-	-	± 4	μA
supply current	I_{CC}	$V_I=GND$ or V_{CC} ; $I_O=0A$; $V_{CC}=0.8V$ to $3.6V$	-	-	4	μA
additional supply current	ΔI_{CC}	data input; $V_I=V_{CC}-0.6V$; $I_O=0A$; $V_{CC}=3.3V$	-	-	75	μA
		OE input; $V_I=V_{CC}-0.6V$; $I_O=0A$; $V_{CC}=3.3V$	-	-	180	μA
		all inputs; $V_I=GND$ to $3.6V$; OE=GND; $V_{CC}=0.8V$ to $3.6V$	-	-	1	μA

3.3.4、AC Characteristics 1

($T_{amb}=25^{\circ}C$, voltages are referenced to GND (ground=0V), unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
A to Y propagation delay	t_{PLH} , t_{PHL}	see Figure 4	$C_L=5pF$			
			$V_{CC}=0.8V$			
			-	20.6	-	ns
			$V_{CC}=1.1V$ to $1.3V$			
			2.8	5.5	10.5	ns
			$V_{CC}=1.4V$ to $1.6V$			
			2.2	3.9	6.1	ns
			$V_{CC}=1.65V$ to $1.95V$			
			1.9	3.2	4.8	ns
			$V_{CC}=2.3V$ to $2.7V$			
			1.6	2.6	3.6	ns
			$V_{CC}=3.0V$ to $3.6V$			
			1.4	2.4	3.1	ns
			$C_L=10pF$			
			$V_{CC}=0.8V$			
			-	24.0	-	ns
			$V_{CC}=1.1V$ to $1.3V$			
			3.2	6.4	12.3	ns
			$V_{CC}=1.4V$ to $1.6V$			
			2.1	4.5	7.3	ns
			$V_{CC}=1.65V$ to $1.95V$			
			1.9	3.8	5.5	ns
			$V_{CC}=2.3V$ to $2.7V$			
			2.1	3.2	4.2	ns
			$V_{CC}=3.0V$ to $3.6V$			
			1.8	3.0	3.8	ns
			$C_L=15pF$			
			$V_{CC}=0.8V$			
			-	27.4	-	ns
			$V_{CC}=1.1V$ to $1.3V$			
			3.6	7.2	14.1	ns
			$V_{CC}=1.4V$ to $1.6V$			
			3.0	5.1	8.1	ns
			$V_{CC}=1.65V$ to $1.95V$			
			2.2	4.3	6.3	ns
			$V_{CC}=2.3V$ to $2.7V$			
			2.0	3.7	4.9	ns
			$V_{CC}=3.0V$ to $3.6V$			
			2.0	3.5	4.4	ns
			$C_L=30pF$			
			$V_{CC}=0.8V$			
			-	37.4	-	ns
			$V_{CC}=1.1V$ to $1.3V$			
			4.8	9.5	18.7	ns
			$V_{CC}=1.4V$ to $1.6V$			
			4.0	6.7	10.8	ns
			$V_{CC}=1.65V$ to $1.95V$			
			2.9	5.6	8.4	ns
			$V_{CC}=2.3V$ to $2.7V$			
			2.7	4.8	6.3	ns
			$V_{CC}=3.0V$ to $3.6V$			
			2.7	4.6	5.8	ns



OE to Y enable time	t_{PZL}, t_{PZH}	see Figure 5	$C_L=5pF$				
			$V_{CC}=0.8V$	-	71.6	-	ns
			$V_{CC}=1.1V$ to 1.3V	2.8	6.2	12.4	ns
			$V_{CC}=1.4V$ to 1.6V	2.3	4.2	6.9	ns
			$V_{CC}=1.65V$ to 1.95V	1.9	3.3	5.3	ns
			$V_{CC}=2.3V$ to 2.7V	1.5	2.4	3.6	ns
			$V_{CC}=3.0V$ to 3.6V	1.3	2.0	2.9	ns
			$C_L=10pF$				
			$V_{CC}=0.8V$	-	75.3	-	ns
			$V_{CC}=1.1V$ to 1.3V	3.2	7.1	14.1	ns
			$V_{CC}=1.4V$ to 1.6V	2.2	4.8	8.0	ns
			$V_{CC}=1.65V$ to 1.95V	1.8	3.9	5.9	ns
			$V_{CC}=2.3V$ to 2.7V	1.5	2.9	4.2	ns
			$V_{CC}=3.0V$ to 3.6V	1.4	2.6	3.6	ns
			$C_L=15pF$				
			$V_{CC}=0.8V$	-	79.2	-	ns
			$V_{CC}=1.1V$ to 1.3V	3.6	7.8	15.8	ns
			$V_{CC}=1.4V$ to 1.6V	3.0	5.4	8.8	ns
			$V_{CC}=1.65V$ to 1.95V	2.1	4.3	6.7	ns
			$V_{CC}=2.3V$ to 2.7V	1.8	3.4	4.8	ns
			$V_{CC}=3.0V$ to 3.6V	1.6	3.1	4.3	ns
			$C_L=30pF$				
			$V_{CC}=0.8V$	-	90.6	-	ns
			$V_{CC}=1.1V$ to 1.3V	4.7	10.0	20.4	ns
			$V_{CC}=1.4V$ to 1.6V	3.0	6.9	11.3	ns
OE to Y disable time	t_{PHZ}, t_{PLZ}	see Figure 5	$C_L=5pF$				
			$V_{CC}=0.8V$	-	10.3	-	ns
			$V_{CC}=1.1V$ to 1.3V	2.6	4.2	6.2	ns
			$V_{CC}=1.4V$ to 1.6V	2.1	3.2	4.4	ns
			$V_{CC}=1.65V$ to 1.95V	2.1	3.1	4.4	ns
			$V_{CC}=2.3V$ to 2.7V	1.7	2.4	3.2	ns
			$V_{CC}=3.0V$ to 3.6V	2.1	2.8	3.6	ns
			$C_L=10pF$				
			$V_{CC}=0.8V$	-	12.2	-	ns
			$V_{CC}=1.1V$ to 1.3V	3.5	5.3	7.6	ns
			$V_{CC}=1.4V$ to 1.6V	2.2	4.1	5.6	ns
			$V_{CC}=1.65V$ to 1.95V	2.4	4.2	5.7	ns
			$V_{CC}=2.3V$ to 2.7V	1.9	3.2	4.1	ns
			$V_{CC}=3.0V$ to 3.6V	2.4	4.1	5.0	ns
			$C_L=15pF$				
			$V_{CC}=0.8V$	-	14.9	-	ns
			$V_{CC}=1.1V$ to 1.3V	4.3	6.4	8.5	ns



			V _{CC} =1.4V to 1.6V	3.0	5.0	6.6	ns
			V _{CC} =1.65V to 1.95V	3.1	5.4	6.6	ns
			V _{CC} =2.3V to 2.7V	2.4	4.0	5.0	ns
			V _{CC} =3.0V to 3.6V	3.2	5.3	6.2	ns
			C _L =30pF				
			V _{CC} =0.8V	-	51.6	-	ns
			V _{CC} =1.1V to 1.3V	6.0	9.8	13.6	ns
			V _{CC} =1.4V to 1.6V	4.5	7.7	10.5	ns
			V _{CC} =1.65V to 1.95V	5.2	8.8	11.4	ns
			V _{CC} =2.3V to 2.7V	3.9	6.4	7.4	ns
			V _{CC} =3.0V to 3.6V	5.5	9.0	10.7	ns

3.3.5、AC Characteristics 2

(T_{amb}= -40°C to +85°C, voltages are referenced to GND (ground=0V), unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
A to Y propagation delay	t _{PLH} , t _{PHL}	see Figure 4	C _L =5pF				
			V _{CC} =1.1V to 1.3V	2.5	-	11.7	ns
			V _{CC} =1.4V to 1.6V	2.0	-	7.3	ns
			V _{CC} =1.65V to 1.95V	1.7	-	6.1	ns
			V _{CC} =2.3V to 2.7V	1.4	-	4.3	ns
			V _{CC} =3.0V to 3.6V	1.2	-	3.9	ns
			C _L =10pF				
			V _{CC} =1.1V to 1.3V	3.0	-	13.8	ns
			V _{CC} =1.4V to 1.6V	1.9	-	8.5	ns
			V _{CC} =1.65V to 1.95V	1.7	-	6.8	ns
			V _{CC} =2.3V to 2.7V	1.6	-	5.3	ns
			V _{CC} =3.0V to 3.6V	1.6	-	4.6	ns
			C _L =15pF				
			V _{CC} =1.1V to 1.3V	3.3	-	15.8	ns
			V _{CC} =1.4V to 1.6V	2.5	-	9.8	ns
			V _{CC} =1.65V to 1.95V	2.0	-	7.9	ns
			V _{CC} =2.3V to 2.7V	1.8	-	6.0	ns
			V _{CC} =3.0V to 3.6V	1.8	-	5.4	ns
			C _L =30pF				
			V _{CC} =1.1V to 1.3V	4.4	-	21.4	ns
			V _{CC} =1.4V to 1.6V	3.0	-	13.0	ns
			V _{CC} =1.65V to 1.95V	2.6	-	10.3	ns
			V _{CC} =2.3V to 2.7V	2.5	-	7.8	ns
			V _{CC} =3.0V to 3.6V	2.5	-	7.0	ns
OE to Y enable time	t _{PZL} , t _{PZH}	see Figure 5	C _L =5pF				
			V _{CC} =1.1V to 1.3V	2.6	-	13.6	ns
			V _{CC} =1.4V to 1.6V	2.2	-	7.4	ns
			V _{CC} =1.65V to 1.95V	1.7	-	5.9	ns
			V _{CC} =2.3V to 2.7V	1.4	-	3.8	ns
			V _{CC} =3.0V to 3.6V	1.2	-	3.2	ns



			C _L =10pF				
			V _{CC} =1.1V to 1.3V	3.0	-	15.4	ns
			V _{CC} =1.4V to 1.6V	2.1	-	8.3	ns
			V _{CC} =1.65V to 1.95V	1.7	-	6.5	ns
			V _{CC} =2.3V to 2.7V	1.4	-	4.5	ns
			V _{CC} =3.0V to 3.6V	1.3	-	3.8	ns
			C _L =15pF				
			V _{CC} =1.1V to 1.3V	3.3	-	17.1	ns
			V _{CC} =1.4V to 1.6V	2.9	-	9.4	ns
			V _{CC} =1.65V to 1.95V	2.0	-	7.3	ns
			V _{CC} =2.3V to 2.7V	1.7	-	5.2	ns
			V _{CC} =3.0V to 3.6V	1.5	-	4.5	ns
			C _L =30pF				
			V _{CC} =1.1V to 1.3V	4.3	-	22.0	ns
			V _{CC} =1.4V to 1.6V	3.7	-	12.0	ns
			V _{CC} =1.65V to 1.95V	3.2	-	9.5	ns
			V _{CC} =2.3V to 2.7V	2.9	-	6.8	ns
			V _{CC} =3.0V to 3.6V	2.7	-	6.4	ns
OE to Y disable time	t _{PHZ} , t _{PLZ}	see Figure 5	C _L =5pF				
			V _{CC} =1.1V to 1.3V	2.9	-	6.4	ns
			V _{CC} =1.4V to 1.6V	2.2	-	4.6	ns
			V _{CC} =1.65V to 1.95V	1.7	-	4.6	ns
			V _{CC} =2.3V to 2.7V	1.4	-	3.4	ns
			V _{CC} =3.0V to 3.6V	1.2	-	3.7	ns
			C _L =10pF				
			V _{CC} =1.1V to 1.3V	3.3	-	7.9	ns
			V _{CC} =1.4V to 1.6V	2.1	-	5.7	ns
			V _{CC} =1.65V to 1.95V	1.7	-	5.8	ns
			V _{CC} =2.3V to 2.7V	1.4	-	4.3	ns
			V _{CC} =3.0V to 3.6V	1.3	-	5.2	ns
			C _L =15pF				
			V _{CC} =1.1V to 1.3V	3.7	-	9.3	ns
			V _{CC} =1.4V to 1.6V	2.5	-	6.9	ns
			V _{CC} =1.65V to 1.95V	2.0	-	7.4	ns
			V _{CC} =2.3V to 2.7V	1.7	-	5.1	ns
			V _{CC} =3.0V to 3.6V	1.5	-	6.7	ns
			C _L =30pF				
			V _{CC} =1.1V to 1.3V	4.7	-	14.3	ns
			V _{CC} =1.4V to 1.6V	3.0	-	10.7	ns
			V _{CC} =1.65V to 1.95V	2.6	-	11.5	ns
			V _{CC} =2.3V to 2.7V	2.3	-	9.0	ns
			V _{CC} =3.0V to 3.6V	2.2	-	10.8	ns



3.3.6、AC Characteristics 3

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
A to Y propagation delay	t _{PLH} , t _{PHL}	see Figure 4	C _L =5pF				
			V _{CC} =1.1V to 1.3V	2.5	-	12.9	ns
			V _{CC} =1.4V to 1.6V	2.0	-	8.1	ns
			V _{CC} =1.65V to 1.95V	1.7	-	6.7	ns
			V _{CC} =2.3V to 2.7V	1.4	-	4.9	ns
			V _{CC} =3.0V to 3.6V	1.2	-	4.4	ns
			C _L =10pF				
			V _{CC} =1.1V to 1.3V	3.0	-	15.2	ns
			V _{CC} =1.4V to 1.6V	1.9	-	9.4	ns
			V _{CC} =1.65V to 1.95V	1.7	-	7.6	ns
			V _{CC} =2.3V to 2.7V	1.6	-	5.9	ns
			V _{CC} =3.0V to 3.6V	1.6	-	5.2	ns
			C _L =15pF				
			V _{CC} =1.1V to 1.3V	3.3	-	17.5	ns
			V _{CC} =1.4V to 1.6V	2.5	-	10.9	ns
			V _{CC} =1.65V to 1.95V	2.0	-	8.8	ns
			V _{CC} =2.3V to 2.7V	1.8	-	6.7	ns
			V _{CC} =3.0V to 3.6V	1.8	-	6.1	ns
			C _L =30pF				
			V _{CC} =1.1V to 1.3V	4.4	-	24.0	ns
			V _{CC} =1.4V to 1.6V	3.0	-	14.5	ns
			V _{CC} =1.65V to 1.95V	2.6	-	11.5	ns
			V _{CC} =2.3V to 2.7V	2.5	-	8.7	ns
			V _{CC} =3.0V to 3.6V	2.5	-	8.3	ns
OE to Y enable time	t _{PZL} , t _{PZH}	see Figure 5	C _L =5pF				
			V _{CC} =1.1V to 1.3V	2.6	-	13.6	ns
			V _{CC} =1.4V to 1.6V	2.2	-	7.7	ns
			V _{CC} =1.65V to 1.95V	1.7	-	6.2	ns
			V _{CC} =2.3V to 2.7V	1.4	-	4.1	ns
			V _{CC} =3.0V to 3.6V	1.2	-	3.4	ns
			C _L =10pF				
			V _{CC} =1.1V to 1.3V	3.0	-	15.4	ns
			V _{CC} =1.4V to 1.6V	2.1	-	8.6	ns
			V _{CC} =1.65V to 1.95V	1.7	-	6.8	ns
			V _{CC} =2.3V to 2.7V	1.4	-	4.8	ns
			V _{CC} =3.0V to 3.6V	1.3	-	4.0	ns
			C _L =15pF				
			V _{CC} =1.1V to 1.3V	3.3	-	17.1	ns
			V _{CC} =1.4V to 1.6V	2.9	-	9.7	ns
			V _{CC} =1.65V to 1.95V	2.0	-	7.7	ns
			V _{CC} =2.3V to 2.7V	1.7	-	5.6	ns
			V _{CC} =3.0V to 3.6V	1.5	-	4.7	ns



			$C_L=30\text{pF}$			
			$V_{CC}=1.1\text{V to }1.3\text{V}$	4.3	-	22.0 ns
			$V_{CC}=1.4\text{V to }1.6\text{V}$	3.7	-	12.5 ns
			$V_{CC}=1.65\text{V to }1.95\text{V}$	3.2	-	10.1 ns
			$V_{CC}=2.3\text{V to }2.7\text{V}$	2.9	-	7.3 ns
			$V_{CC}=3.0\text{V to }3.6\text{V}$	2.7	-	6.7 ns
			$C_L=5\text{pF}$			
			$V_{CC}=1.1\text{V to }1.3\text{V}$	2.9	-	6.5 ns
			$V_{CC}=1.4\text{V to }1.6\text{V}$	2.2	-	4.7 ns
			$V_{CC}=1.65\text{V to }1.95\text{V}$	1.7	-	4.8 ns
			$V_{CC}=2.3\text{V to }2.7\text{V}$	1.4	-	3.6 ns
OE to Y disable time	t_{PHZ}, t_{PLZ}	see Figure 5	$V_{CC}=3.0\text{V to }3.6\text{V}$	1.2	-	3.8 ns
			$C_L=10\text{pF}$			
			$V_{CC}=1.1\text{V to }1.3\text{V}$	3.3	-	7.9 ns
			$V_{CC}=1.4\text{V to }1.6\text{V}$	2.1	-	5.9 ns
			$V_{CC}=1.65\text{V to }1.95\text{V}$	1.7	-	6.0 ns
			$V_{CC}=2.3\text{V to }2.7\text{V}$	1.4	-	4.5 ns
			$V_{CC}=3.0\text{V to }3.6\text{V}$	1.3	-	5.3 ns
			$C_L=15\text{pF}$			
			$V_{CC}=1.1\text{V to }1.3\text{V}$	3.7	-	9.4 ns
			$V_{CC}=1.4\text{V to }1.6\text{V}$	2.5	-	7.0 ns
			$V_{CC}=1.65\text{V to }1.95\text{V}$	2.0	-	7.5 ns
			$V_{CC}=2.3\text{V to }2.7\text{V}$	1.7	-	5.5 ns
			$V_{CC}=3.0\text{V to }3.6\text{V}$	1.5	-	6.9 ns
			$C_L=30\text{pF}$			
			$V_{CC}=1.1\text{V to }1.3\text{V}$	4.7	-	14.4 ns
			$V_{CC}=1.4\text{V to }1.6\text{V}$	3.0	-	11.0 ns
			$V_{CC}=1.65\text{V to }1.95\text{V}$	2.6	-	11.6 ns
			$V_{CC}=2.3\text{V to }2.7\text{V}$	2.3	-	10.2 ns
			$V_{CC}=3.0\text{V to }3.6\text{V}$	2.2	-	12.0 ns



4、Testing Circuit

4.1、AC Testing Circuit

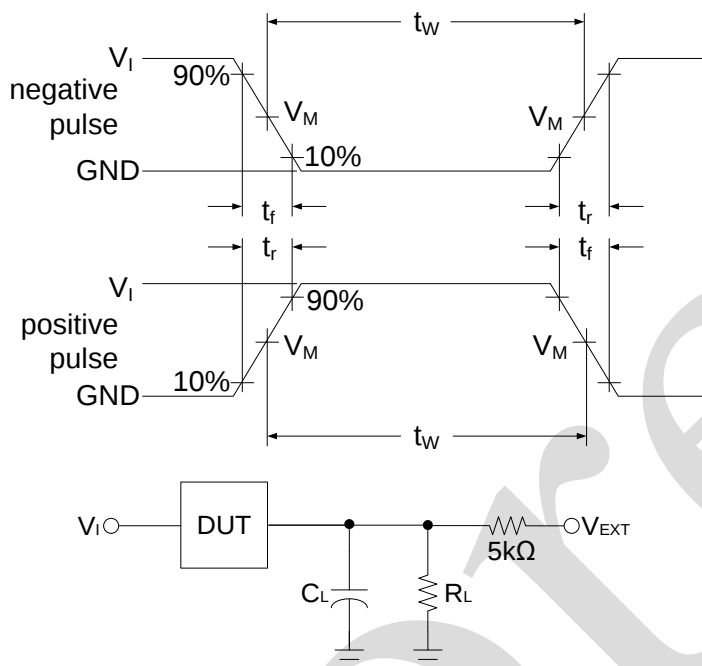


Figure 3. Test circuit for measuring switching times

C_L includes probe and jig capacitance.

R_L =Load resistance.

4.2、AC Testing Waveforms

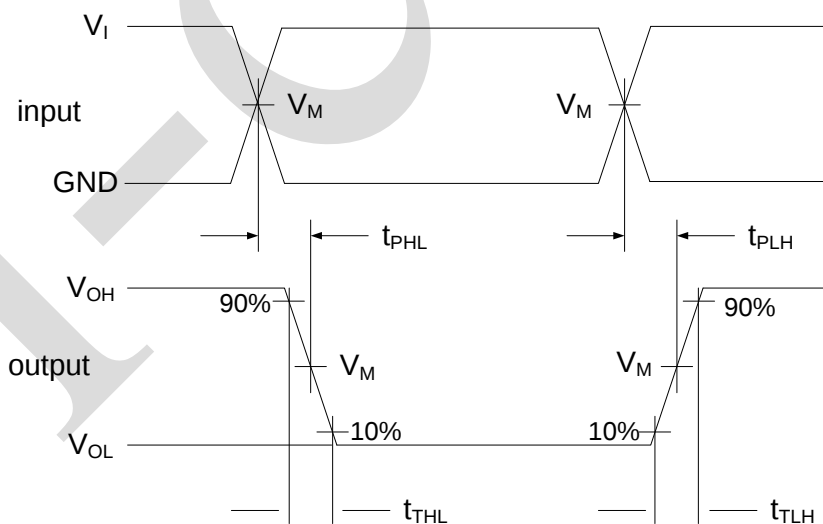


Figure 4. The input A to output Y propagation delays

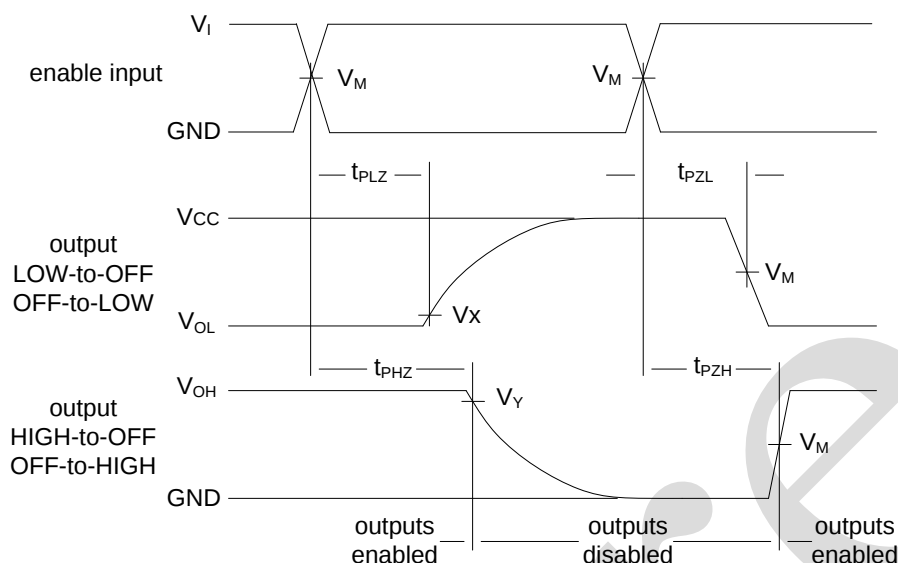


Figure 5. 3-state enable and disable times

4.3、Measurement Points

Supply voltage	Output	Input		
V_{CC}	V_M	V_M	V_X	V_Y
0.8V to 1.6V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.1V$	$V_{OH} - 0.1V$
1.65V to 2.7V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
3.0V to 3.6V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$



4.4、Test Data

Supply voltage	Load		V_{EXT}		
V_{CC}	C_L	R_L	t_{PLH} , t_{PHL}	t_{PZH} , t_{PHZ}	t_{PZL} , t_{PLZ}
0.8V to 3.6V	5pF, 10pF, 15pF and 30pF	5k Ω or 1M Ω	open	GND	$2 \times V_{CC}$



5、Package Information




5.1、SOT23-5

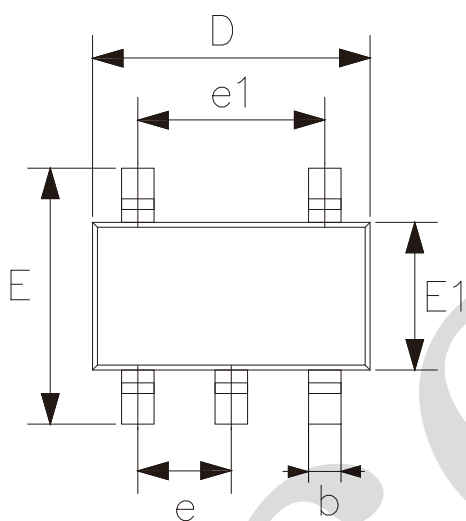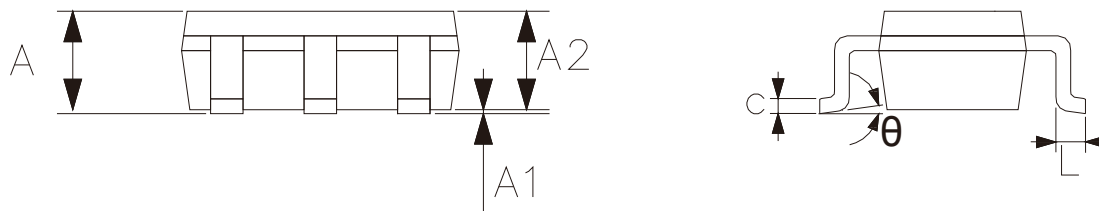

2023/12/A	Dimensions In Millimeters	
Symbol	Min.	Max.
A	—	1.26
A1	0.00	0.12
A2	1.00	1.20
b	0.30	0.50
c	0.10	0.20
D	2.82	3.02
E	2.60	3.00
E1	1.50	1.70
e	0.95	
e1	1.80	2.00
L	0.30	0.60
θ	0°	8°



5.2、SOT353

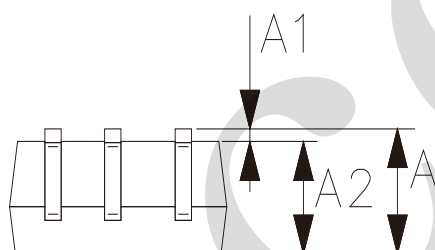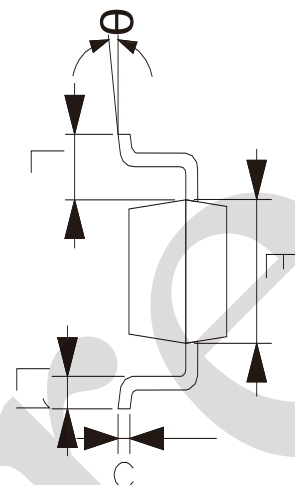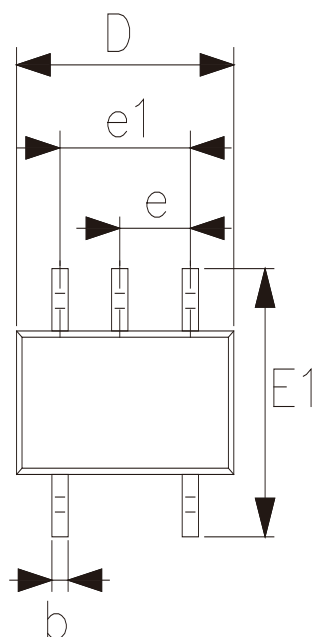

2023/12/A	Dimensions In Millimeters	
Symbol	Min.	Max.
A	0.90	1.10
A1	0.00	0.10
A2	0.90	1.00
b	0.15	0.35
c	0.11	0.175
D	2.00	2.20
E	1.15	1.35
E1	2.15	2.45
e	0.65	
e1	1.20	1.40
L	0.525	
L1	0.26	0.46
θ	0°	8°



6、Statements And Notes

6.1、The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.									

6.2、Notes

We recommend you to read this chapter carefully before using this product.

The information in this chapter is provided for reference only and i-Core disclaims any express or implied warranties, including but not limited to applicability, special application or non-infringement of third party rights.

This product is not suitable for critical equipment such as life-saving, life-sustaining or safety equipment. It is also not suitable for applications that may result in personal injury, death, or serious property or environmental damage due to product malfunction or failure. I-Core will not be liable for any damages incurred by the customers at their own risk for such applications.

The customer is responsible for conducting all necessary tests i-Core's application to avoid failure in the application or the application of the customer's third party users. I-Core does not accept any liability.

The Company reserves the right to change or improve the information published in this chapter at any time. The information in this chapter are subject to change without notice. We recommend the customer to consult our sales staff before purchasing.

Please obtain related materials from i-Core's regular channels and we are not responsible for its content if it is provided by sources other than our company.

In case of any conflict between the Chinese and English version, the version is subject to the Chinese one.